

Multi-function valve

MFV 050

sera – Multi-function valve MFV 050

Compact solution at a reasonable price for safer and more efficient dosing processes.



Operative range

The multi-function valve MFV 050 is designed for dosing pumps with a capacity of up to 50 l/h.


One Valve – four Functions

- **Pressure-keeping valve**
Integrated pressure-keeping function for high dosing accuracy.
- **Relief valve**
Different pressure ranges with 4, 6 or 10 bar for an optimal protection of the pump against overload.
- **Pressure relief**
Higher safety, for example by reducing the system pressure before maintenance works.
- **Ventilation**
For unproblematic commissioning of dosing pumps with small capacities.

Multi-function valve


MFV 050

Function: Pressure-keeping valve

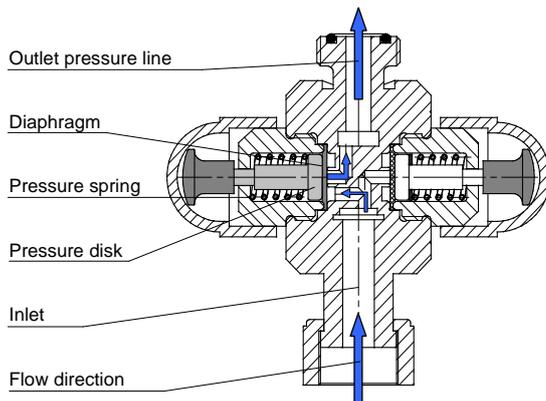

If the admission pressure increases beyond the opening pressure, the diaphragm is raised against the spring force and the valve opens.

Function: Relief valve

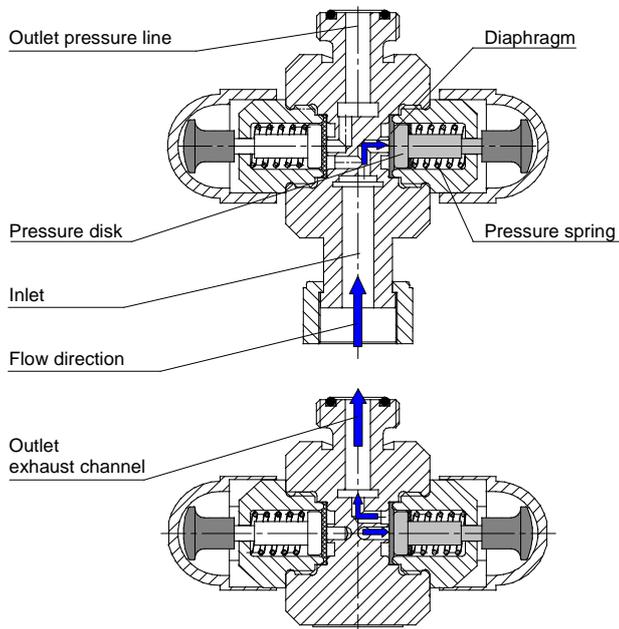

If the admission pressure increases beyond the opening pressure, the diaphragm is raised against the spring force and the valve opens.

Function: Pressure relief

The simultaneous pulling of both handles causes the opening of the pressure-keeping valve as well as the relief valve. The system pressure is reduced via the exhaust channel to a relatively small remaining pressure.

The loosening or removal of pipes is not necessary any more!

Function: Ventilation

The multi-function valve can be used as a vent valve for dosing pumps with small stroke volumes and without ventilation at the pump head.

(for example priming problems during the commissioning of the dosing pump or after a drum exchange).

Mounting

The multi-function valve MFV 050 is directly mounted onto the pressure valve of the dosing pump.

Technical data

Materials

Valve body:	PVC, PP or PVDF
Diaphragms:	PTFE-faced
Valve seals:	EPDM, FPM or FEP-covered

Connections

Inlet:	Union nut G $\frac{3}{4}$
Outlet:	Male thread G $\frac{3}{4}$

Operative range

Dosing pumps up to 50 ltr./h with liquid media (fluids) that are similar to water.

Pressure range

Pressure keeping valve:	1,0 – 1,5 bar (holding pressure)
Relief valve:	4, 6 or 10 bar

Weight

PVC and PVDF	= 0,25 kg
PP	= 0,20 kg

Local sera - Representative:

sera GmbH
sera-Straße 1
34376 Immenhausen
Germany
Tel. +49 5673 999-00
Fax +49 5673 999-01
www.sera-web.com
info@sera-web.com