

In-line Refractometer PRM-TANK α

Cat.No.3575


Direct tank mounting

Extraction / boiling /
polymerization / fermentation /
juicing / filtration
Continuous measurement of
concentration in the tank



Nothing sticks to it!

The flat sample stage prevents residues
from building up around the prism,
ensuring accurate measurements
for a long time.

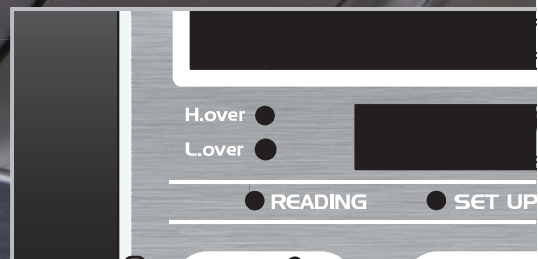


Clean and easy-to-use
operation panel.

In-line Refractometer PRM-TANK α Cat.No.3575




Installation examples


Ingredient Preparation

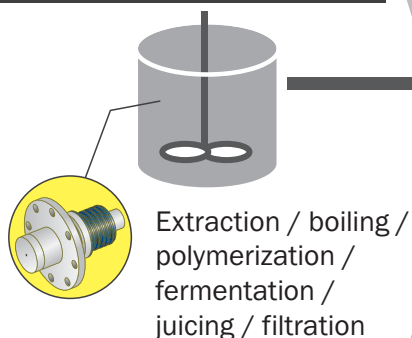

Blending

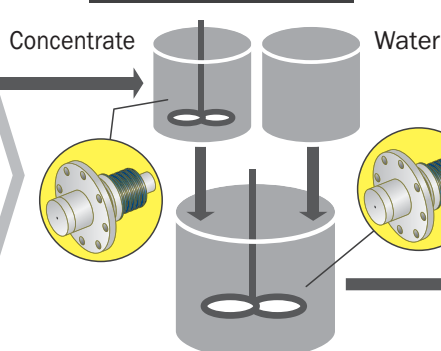

Packaging



The PRM-TANK α will monitor every step of your process.


Specifications

Measurement items	One of Refractive Index (nD), Brix (temperature compensation according to sucrose solution), or concentration (%) (temperature compensation according to samples), and temperature
Measurement range	Refractive index (nD) : 1.31700 to 1.51000 Brix : 0.00 to 85.00%
Resolution	Refractive index (nD) : 0.0001 or 0.00001 Brix : 0.1 or 0.01% (by selection)
Measurement accuracy	Refractive index (nD) : ± 0.0001 Brix : $\pm 0.1\%$
Measurement temperature	5 to 100°C
High and low limit settings	High and low control limits can be set by the keys.
Display items	Refractive Index (nD), Brix, concentration (%), temperature (°C)
Display method	Seven-segment LED
Output items	Refractive Index (nD), Brix, concentration (%), temperature (°C)
Output method	DC4 to 20mA, RS-232C
Alarm output	Open-collector output for high and low limit settings (alarm output)
Connecting cables	Detection section - Display section (power supply 12V and RS-485) Length: standard 15m (maximum up to 200m)
Light source	LED (D line approximation)
Material	Prism : Synthetic sapphire Prism packing : FEP, PTFE Flange Packing : PTFE Prism stage : SUS316L
International protection class	Detection section: IP66, Calculation display section: IP65
Power supply	AC100 to 240V, 50/60Hz
Input rating	30VA
Pressure resistance	1.0MPa (detection section)
Dimensions and weight	Detection section: 10.8×26.6×10.8cm, 3.3kg, Calculation display section: 19.2×10×24cm, 3.3kg


Dimensions

Unit of length: mm

Detection section Weight:12.3kg

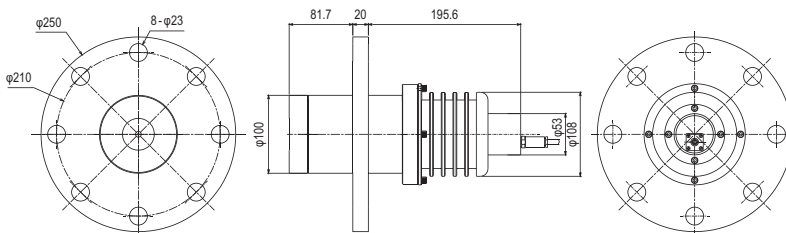

Calculation display section Weight:3.3kg

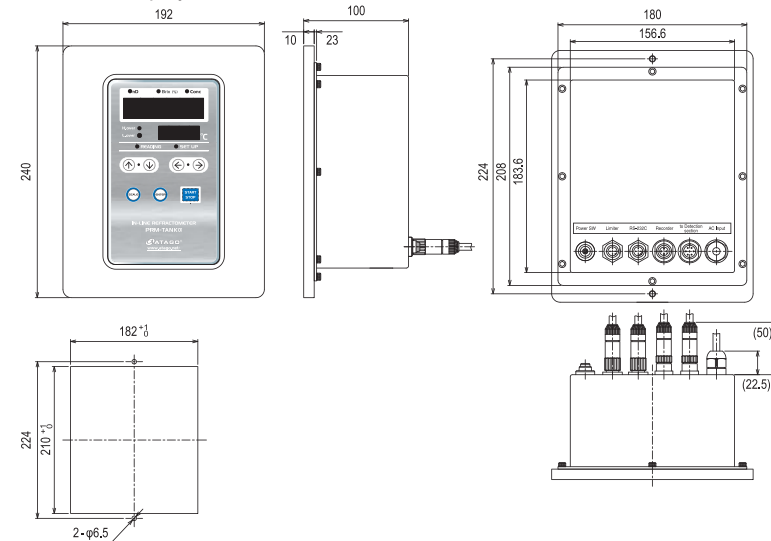

All ATAGO refractometers are designed and manufactured in Japan.



<http://www.atago.net/> overseas@atago.net

Headquarters: The Front Tower Shiba Koen, 23rd Floor
2-6-3 Shiba-koen, Minato-ku, Tokyo 105-0011, Japan
TEL : 81-3-3431-1943 FAX : 81-3-3431-1945



HACCP GMP GLP

ATAGO products comply with HACCP, GMP, and GLP system standards.

ATAGO U.S.A., Inc.

TEL : 1-425-637-2107

customerservice@atago-usa.com

ATAGO INDIA Instruments Pvt.Ltd.

TEL : 91-22-28544915, 40713232

customerservice@atago-india.com

ATAGO THAILAND Co.,Ltd.

TEL : 662-982-8718-9

customerservice@atago-thailand.com

ATAGO BRASIL Ltda.

TEL : 55 16 3916-6000

customerservice@atago-brasil.com

ATAGO ITALIA s.r.l.

TEL : 39 2 36557267

customerservice@atago-italia.com

ATAGO CHINA Guangzhou Co.,Ltd.

TEL : 86 20-38106065

info@atago-china.com

ATAGO RUSSIA Ltd.

TEL : +7(812)339-20-02

info@atago-russia.com

* Specifications and appearance are subject to change without notice.